



Ceva DC **High Flow** Pump Range

Built on the success of our already popular Ceva range, the new High Flow pumps are to deliver exceptional performance for homes and farms.

You can trust Ceva2 for:

- Unmatched reliability, with a 2-year warranty
- SS304 stainless steel construction
- A durable oil-filled motor for long-lasting, efficient operation
- Dry-run protection to safeguard your pump in low-water conditions
- Higher Voc limits to suit modern solar panel setups
- Installation up to 70 m below water level, deeper than rival DC pumps

With Cedar Pumps, you're not just getting a pump. You're investing in quality, innovation and peace of mind.

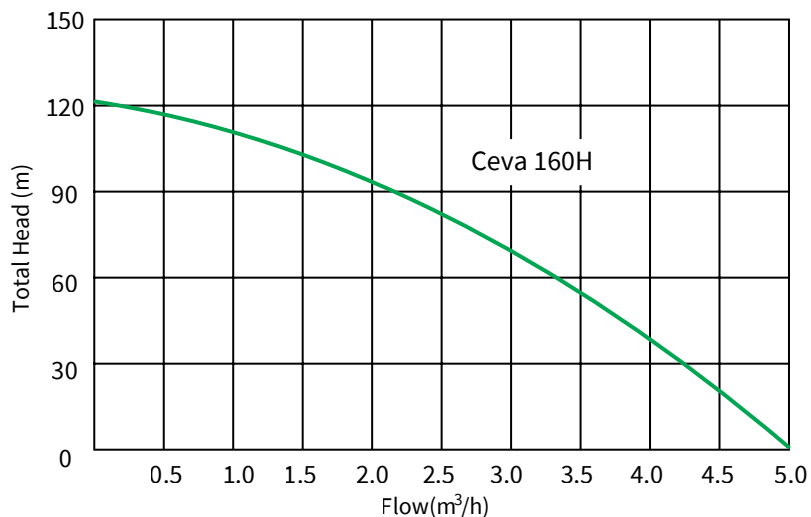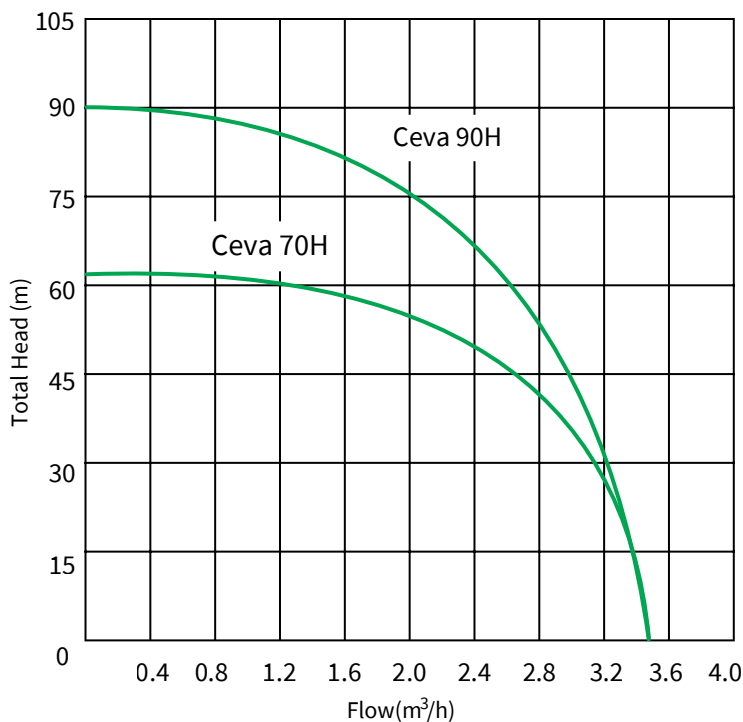

Pump Model	Ceva 70H	Ceva 90H	Ceva 160H
Type	Centrifugal	Centrifugal	Centrifugal
Rating (W)	500	750	1500
Max Head (m)	62	95	120
Max Flow (m³/h)	3.5	3.5	5.0
Max Depth (m under water)	70	70	70
Optimal Volts (Voc)	100	150	200
Diameter	3" / 76mm	3" / 76mm	4" / 100mm
Outlet	32mm	32mm	32mm
Max Voltage (V)*	105	160	210
DC Controller Voltage	48	72	120
Max Current (A)	17	17	17
Controller	External	External	External
Well Sensor & cable included?	No	No	No
Recommended Dry Run Sensor	External (No internal sensor)	External (No internal sensor)	External (No internal sensor)
Warranty	2 Years	2 Years	2 Years
Recommended Solar Panel Power	≥ 1.3 × Pump Power	≥ 1.3 × Pump Power	≥ 1.3 × Pump Power
Panel Connection (Parallel or Series)	Series	Series	Series